
## TALON DVR BURNING VIDEO

In the Search screen click on



The following menu appears

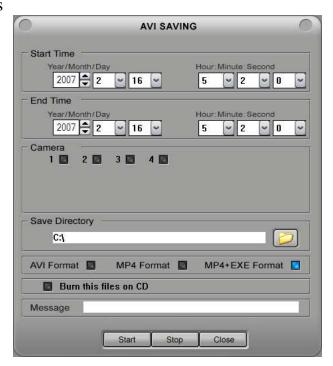

Select the starting and ending date and time.

Choose the cameras to record.

Choose a directory other than the cd drive. C:\ will work if there's room.

Select the MP4+EXE format.

Check box to burn files to cd.

Click on Start.

You will see the progress of the files being saved in the "Message" window.

The software will save the files to the selected directory before burning them to the cd. After the files are saved, this screen will pop up.

Device HL-I	DT-ST RW/DVD GCC-4521B 1.	05 🔻	Close
File Name		File Size	ADD File
☐ C:\Cam01[12_02_16-12_02_16].EXE ☐ C:\Cam02[11_00_08-11_00_24].mp4		472.693 KB 1473.001 KB	ADD Folde
		Delete	
Total Size 1.946 MB			
Total Size		1.946 MB	
Total Size	295.37		

Make sure there is a cd in the drive, and that the "CD FreeSize" is large enough to accommodate the total size of the files to be burned.

If you insert a new cd in the drive, it may be necessary to click "Reload" in order for the software to recognize this cd.

Click "Burn".

## Video Formats:

**AVI Format:** Normal AVI (.avi) format file which can be played with Windows Media Player.

**MP4 Format:** DVR AVI file (.mp4) format which only can be viewed by DVR AVI Viewer.

**MP4+EXE Format:** Self executable DVR AVI file (.exe) format. (No Player needed) This is the preferred format.